

## INDICATIVE SEAL

### FAST SEAL 8-2K (FS8-2K)

Pull-Tight Seal

***Two coloured body for security versatility.***

Fast Seal 8-2K is innovatively designed with Mega Fortris patented two-colour body for improved visibility and eased identification. Its slim round strap makes it suitable for most latches. This is the best choice for security and authentication purposes. These seals include the BioSphere bio-additive.

To provide eco-conscious solutions on a wide array of applications, all Mega Fortris' security seal product lines with plastic content will include the BioSphere bio-additive from 13th May 2024.

**Applications:**


- Retail Applications
- Authentication Tagging
- Logistics
- Banking




Our biodegradable plastic additives go deeper, allowing microbes to consume the C-C bonds within plastic's structure at a macromolecular level. This increases the surface area of plastic products and enables plastophilic microbes to attach to the polymer's newfound cavities. So, unlike regular plastic that can sit in a landfill for hundreds or thousands of years, plastic enhanced with BioSphere attracts over 600 different types of microbes that effectively digest and consume it.

PREVENTION · PROTECTION · PEACE OF MIND



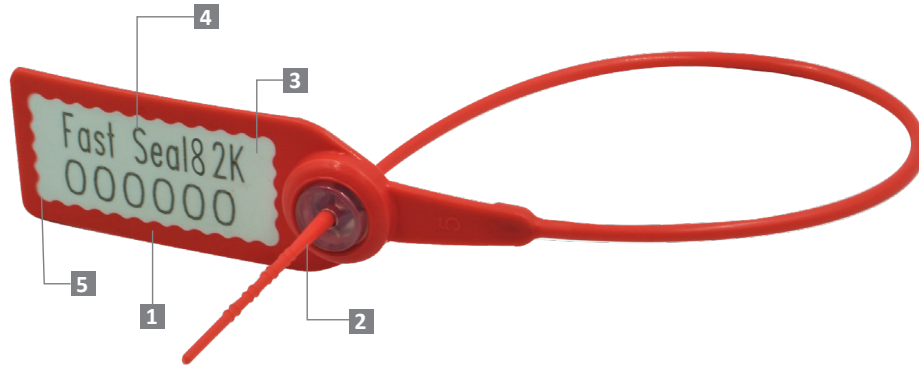


LASER MARKING OPTION



VIEW APPLICATION GIF



- 1 The Fast Seal 2K is moulded with two-colour Polypropylene (PP) material with the metal lock heat staking encapsulated to complement the long thin strap for greater security and clear evidence of tampering.
- 2 One-way locking mechanism is embedded for fast and easy application.
- 3 Two colours on the body improve laser markings definition, visibility, and identification.
- 4 Irreversible identifiers such as name, logo, barcode, serial number and QR code are laser-marked on the flap.
- 5 Additional wavy printing surface on flap gives clear evidence of tampering or removal of identifiers.
- 6 These seals include the BioSphere bio-additive.

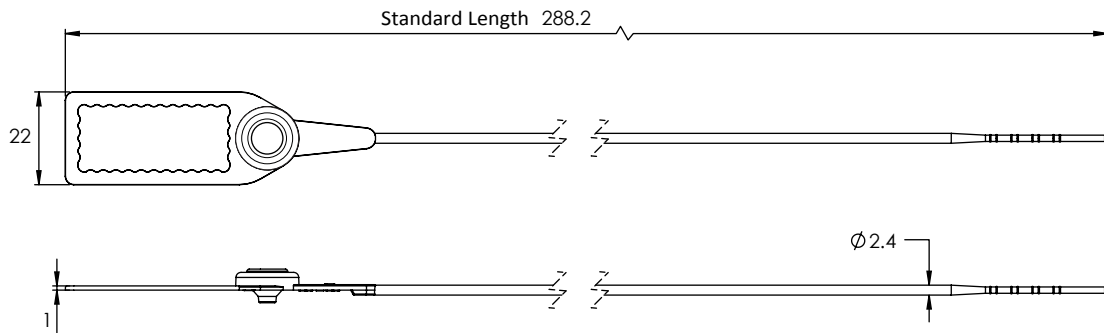

TECHNICAL SPECIFICATIONS

PRODUCT - FAST SEAL 8 - 2K (FS8-2K)

Code	Material	Locking Length	Locking Size	Tensile Strength	Marking Area	Max Marking Digits
FS8-2K	<b>Plastic :</b> Polypropylene (PP) Temperature Range: -5°C to 80°C <b>Metal Jaw :</b> Stainless Steel (SUS 304)	203 mm (8 in)	Ø 2.4 mm (0.1 in)	≥15 kgf (≥33.1 lbf)	15 x 35 mm (0.6 x 1.4 in)	<b>Serial no : 12</b> <b>Barcode : 10</b>

PACKAGING

Carton	Quantity	Dimensions (mm)	Gross Weight (kg)	Volume (m³)	Standard Pastel Colours
Inner	1000	338 x 255 x 190 (13.3 x 10.0 x 7.5 in)	2.5 (5.5 lb)	0.016 (0.6 cu.ft.)	Body : WH PSYL PSOR PSRD PSBL PSGN BK Cap : FR WH Flap : WH BK

For colour customisations, kindly contact us for further information.

**Updated Date : 10 May 2024**